



[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]

[Redacted]





fuel™ 95

fuel™ 90

fuel™ 98

fuel™ powerboxes are designed to give users easy access to concealed power and data outlets from an unobtrusive worktop location.


fuel™ is available in four models to suit different work environments from folding tables and workstations up to larger conference and meeting tables and is designed to work with the widest range of third party power and data soft-wiring systems available.

Cover photo: fuel™ 91 (robot optional)

**PRESS**



1 inch (25.4mm)  
square cutouts  
for data point  
installation.

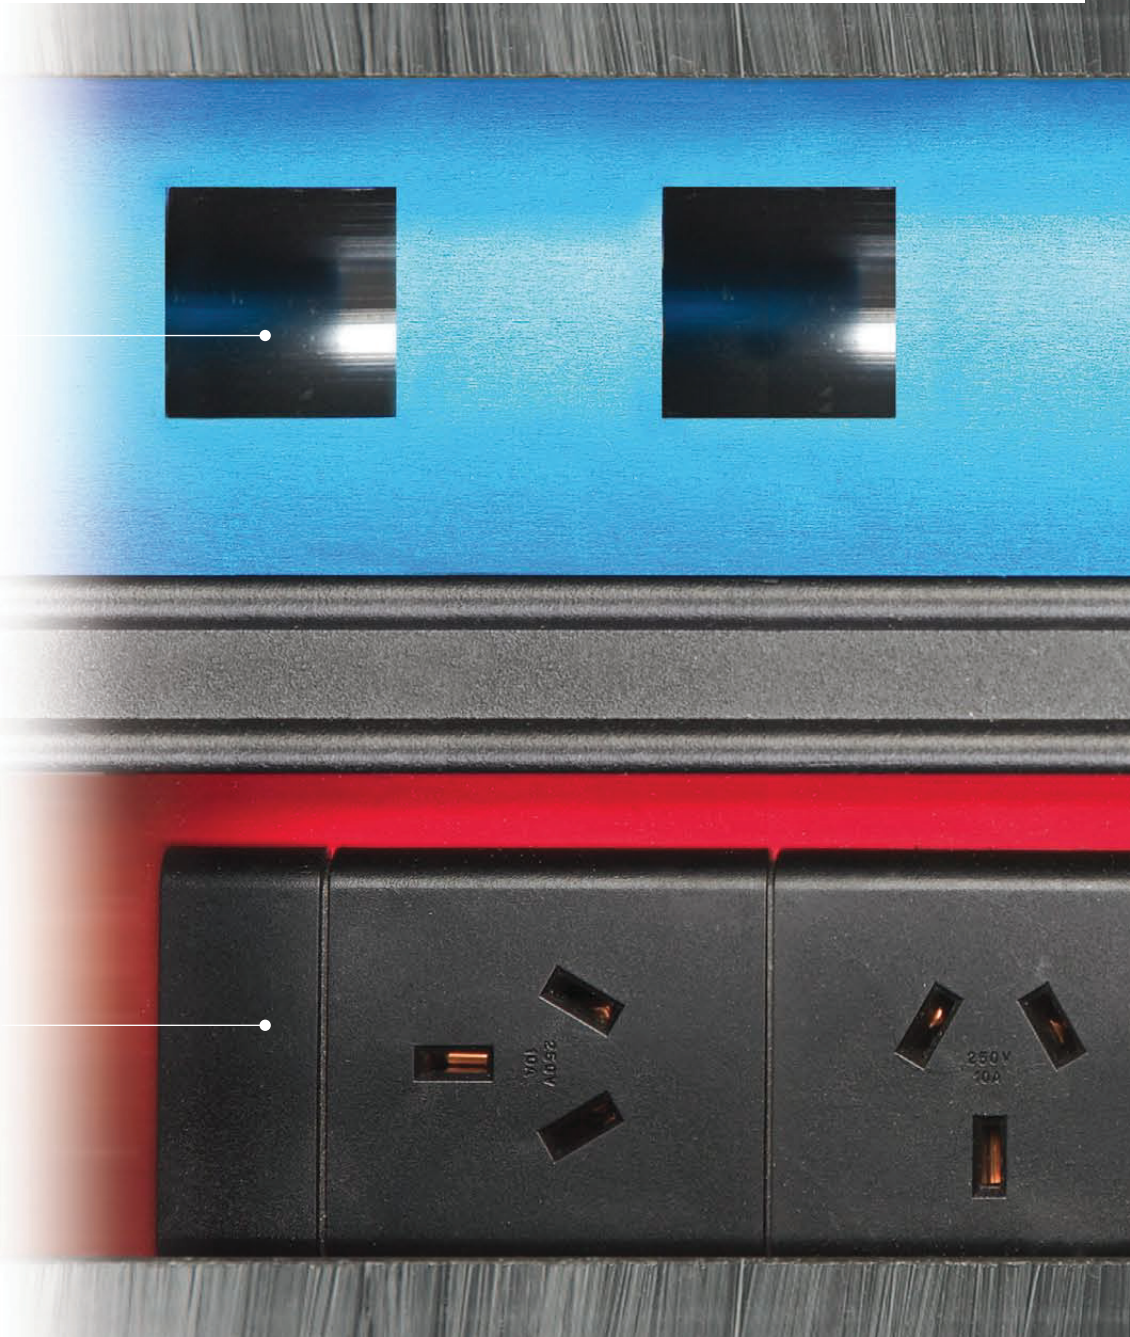


4 outlet GPO  
supplied as  
standard with  
all models







standard 4 outlet GPO



easy access lid for  
power/data ccables



removable end caps  
and floor allow for the  
removal and changing  
of power/data plates



adjustable mounting plates  
to suit different worktop  
thicknesses

The aesthetic of the **fuel**<sup>™</sup> powerbox is simple and elegant with clean lines making it both visually appealing and physically sturdy. There are four **fuel**<sup>™</sup> models to suit the widest possible range of user requirements and work environments.


**fuel**<sup>™</sup> comes supplied with a 4 outlet GPO and data mounting plate which can be used for standard Cat5 or Cat6 data outlets. There are further options available for phone and/or AV outlets.

Power and data mounting plates can be repositioned within the box depending on how much space is required above or below the plate. Plates can be


positioned low to allow for larger power transformers or high to address cable bending restrictions. Removable end caps mean that these plates can be swapped or repositioned even after **fuel**<sup>™</sup> has been installed. A removable floor provides for access from underneath if required.

Installation is straight forward and allows for standard woodworking tolerances on the cutout profile. Once placed in the worktop, mounting brackets can be adjusted without tools to secure **fuel**<sup>™</sup> in a wide range of worktop thicknesses ranging from 12mm to 50mm.

**fuel™ 90 / fuel™ 91  
end view**

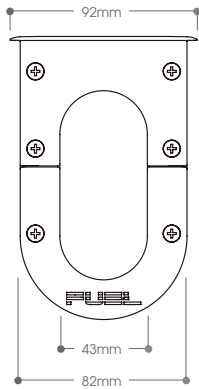


**fuel™ 95 end view**

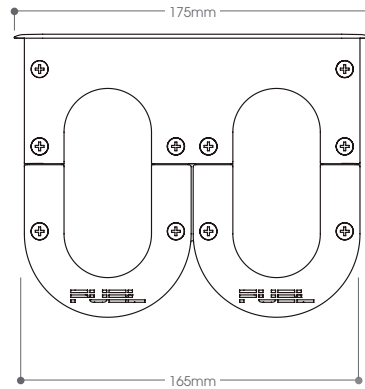


**fuel™ 98 end view**

high centrally mounted rail of i.am™ table base system

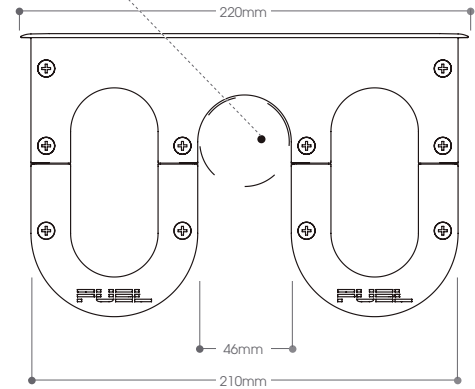

**fuel™ side view**

model	X	Y
90	410mm	400mm
91	1000mm	990mm
95	310mm	300mm
98	410mm	400mm

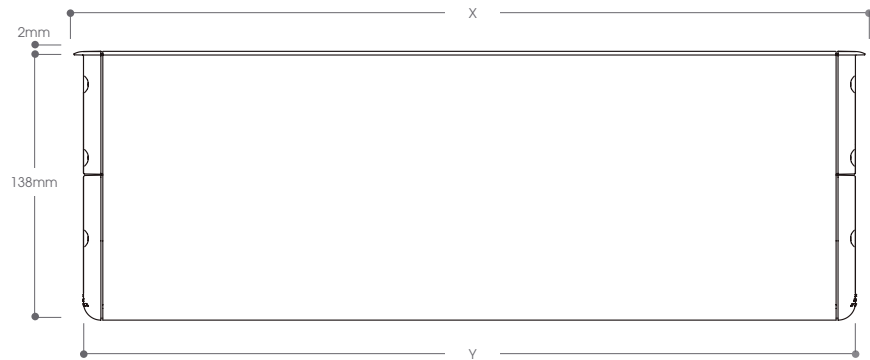

### fuel™ 90

single-sided access, suitable for single users at a workstation or desk.

### fuel™ 91

single sided access, for multiple users. Primarily used in pairs to suit wider meeting and conference tables where one central box would be too far to reach.

### fuel™ 95

double-sided access, suitable for single or multiple users at workstations or smaller meeting tables.

### fuel™ 98

double-sided access, suitable for multiple users at larger meeting or conference tables. Specifically designed to straddle tables with a centrally mounted rail such as the i.am™ range of table bases from Thinking Ergonomix.

model	GPOs supplied	data cutouts supplied
90	4	3
91	4 (max 10)	8 (max 10)
95	4	5
98	4 (max 6)	5 (max 8)